

CT12-55X 12V55Ah(10hr)

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid


General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.

Dimensions and Weight

Length(mm / inch)	277 / 10.9
Width(mm / inch)	106 / 4.17
Height(mm / inch)	229 / 9.02
Total Height(mm / inch)	243 / 9.57
Approx. Weight(Kg / lbs)	16.8/ 37.0

* Weight deviation: $\pm 3\%$

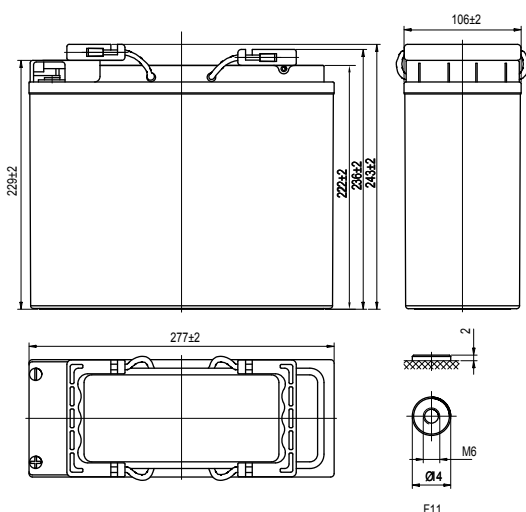

Performance Characteristics

Nominal Voltage	12V
Number of cell	6
Design Life	10 years
Nominal Capacity 77°F(25°C)	
10 hour rate (5.5A, 10.8V)	55Ah
5 hour rate (10.3A, 10.5V)	51.5Ah
1 hour rate (35.5A, 9.6V)	35.5Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	$\leq 8\text{mOhms}$
Self-Discharge	
2% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-10~60°C
Max. Discharge Current 77°F(25°C)	500A(5s)
Short Circuit Current	1250A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.40-2.45VPC
Maximum charging current	16.5A
Temperature compensation	-30mV/ °C
Standby use	2.20-2.30VPC
Temperature compensation	-20mV/ °C

Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/Cell	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	128	94.5	59.8	35.5	15.8	10.5	5.88	3.03
1.65V	116	92.1	57.0	35.2	15.2	10.5	5.76	3.02
1.70V	114	88.9	55.0	34.5	15.0	10.4	5.74	3.01
1.75V	104	83.5	52.8	34.0	14.5	10.3	5.65	3.00
1.80V	97.0	81.1	50.4	33.5	14.1	10.2	5.50	2.98









Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/Cell	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	212	168	114	69.5	30.4	19.3	11.4	5.90
1.65V	211	164	110	67.5	29.3	19.1	11.3	5.87
1.70V	204	161	105	65.7	28.9	19.0	11.2	5.81
1.75V	193	155	99.2	64.1	28.2	18.9	11.0	5.79
1.80V	184	149	95.0	62.3	27.4	18.6	10.8	5.65

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.

All data shall be changed without notice,Vision reserves the right to explain and update the information contained hereinto.

www.vision-batt.com

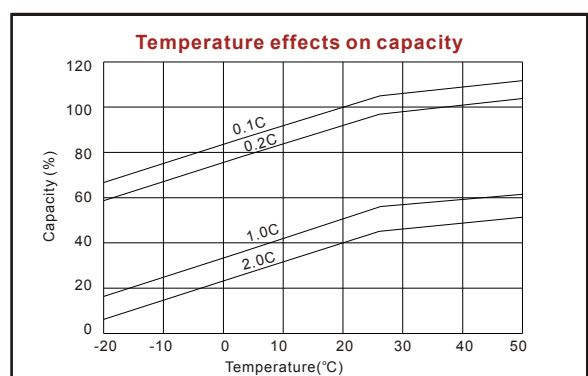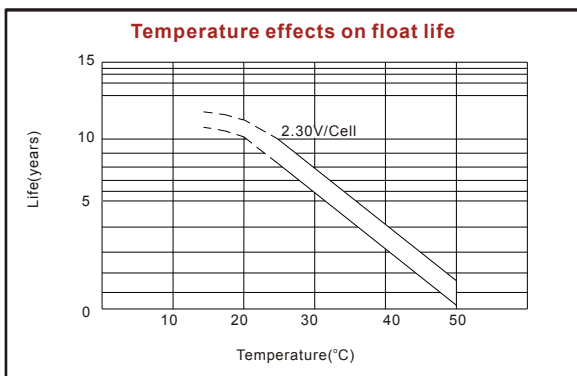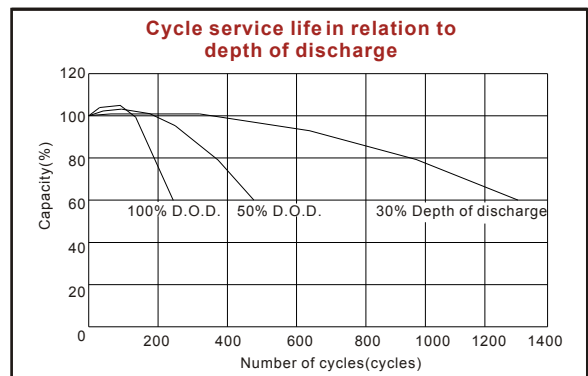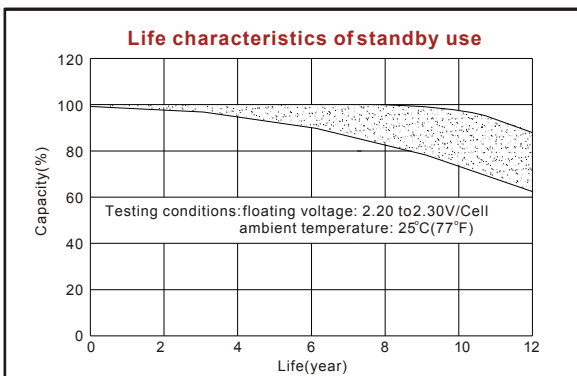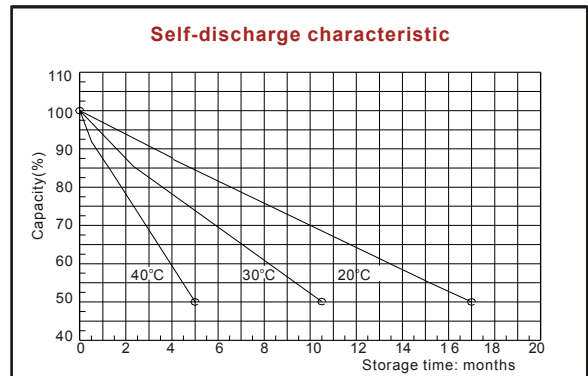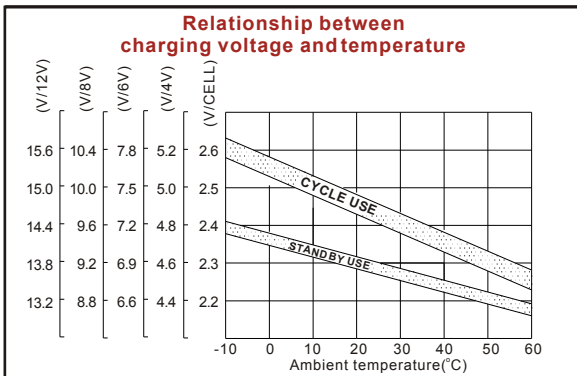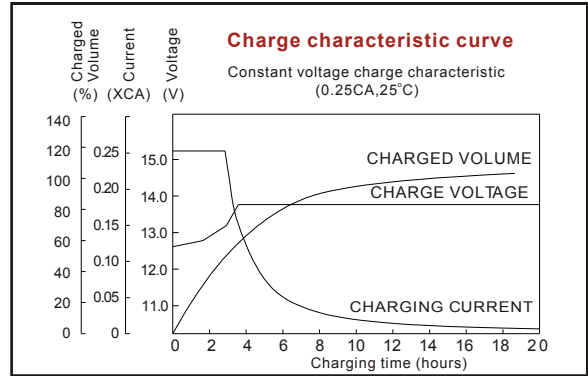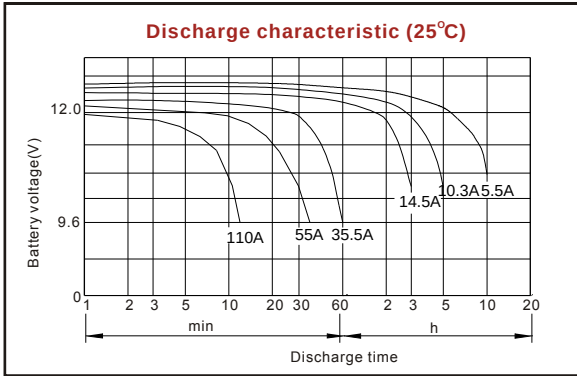

Shenzhen Center PowerTech Co., Ltd.

Center Power Industrial Park, Tongfu Industrial District Dapeng Town, 518120 Shenzhen, China
Tel: (+86-755) 8431 8088 Fax: (+86-755) 8431 8038 E-mail: sales@vision-batt.com



ISO9001:2008



MH25860



G4M19906-9202-E-16



www.vision-batt.com